### SINGLE DISC MACHINES. 140 TO 1600 RPM





# CLEAN IS QUALITY COlumbus

### ROBUST BUILT. FOR POWERFUL PERFORMANCE. AND WE HAVEN'T JUST STARTED TODAY.


- Robust single-disc machines 'Made in Germany' – for over 70 years. For daily, long-term use.
- Low speed machines up to 300 rpm are equipped with a planetary gear set with three planet gears.
- The configuration of the maintenance free planetary gear and the powerful motor is the ideal pair guaranteeing consistently high performance.
- Three non-wearing, helical cut planet gears spread the power evenly across the entire working width, which allows for quiet running and easy control of the machine.
- A belt drive ensures low running noise in machines with high motor speeds of up to 1600 rpm.

- Work safely and with less operator fatigue: includes continuously variable handle grip and a safety button to prevent accidental operation.
- The body casings are made from either metal or out of shatter-proof plastic.
- Large operating range as standard: 12-metre waterproof and kinkproof mains cable.
- Flat construction to fit under radiators, pipes and shelves.
- The rubber bumper ring protects both the machine and the working environment.
- Various accessories available depending on use: tank, sprayer, suction unit with ring for dust-free operation and additional weights for increased surface pressure.



## LOW SPEED. PROS WITH PLANETARY GEAR SET. FOR ANY OBJECT, FOR ANY APPLICATION.

E 400|S bionic E 500|E

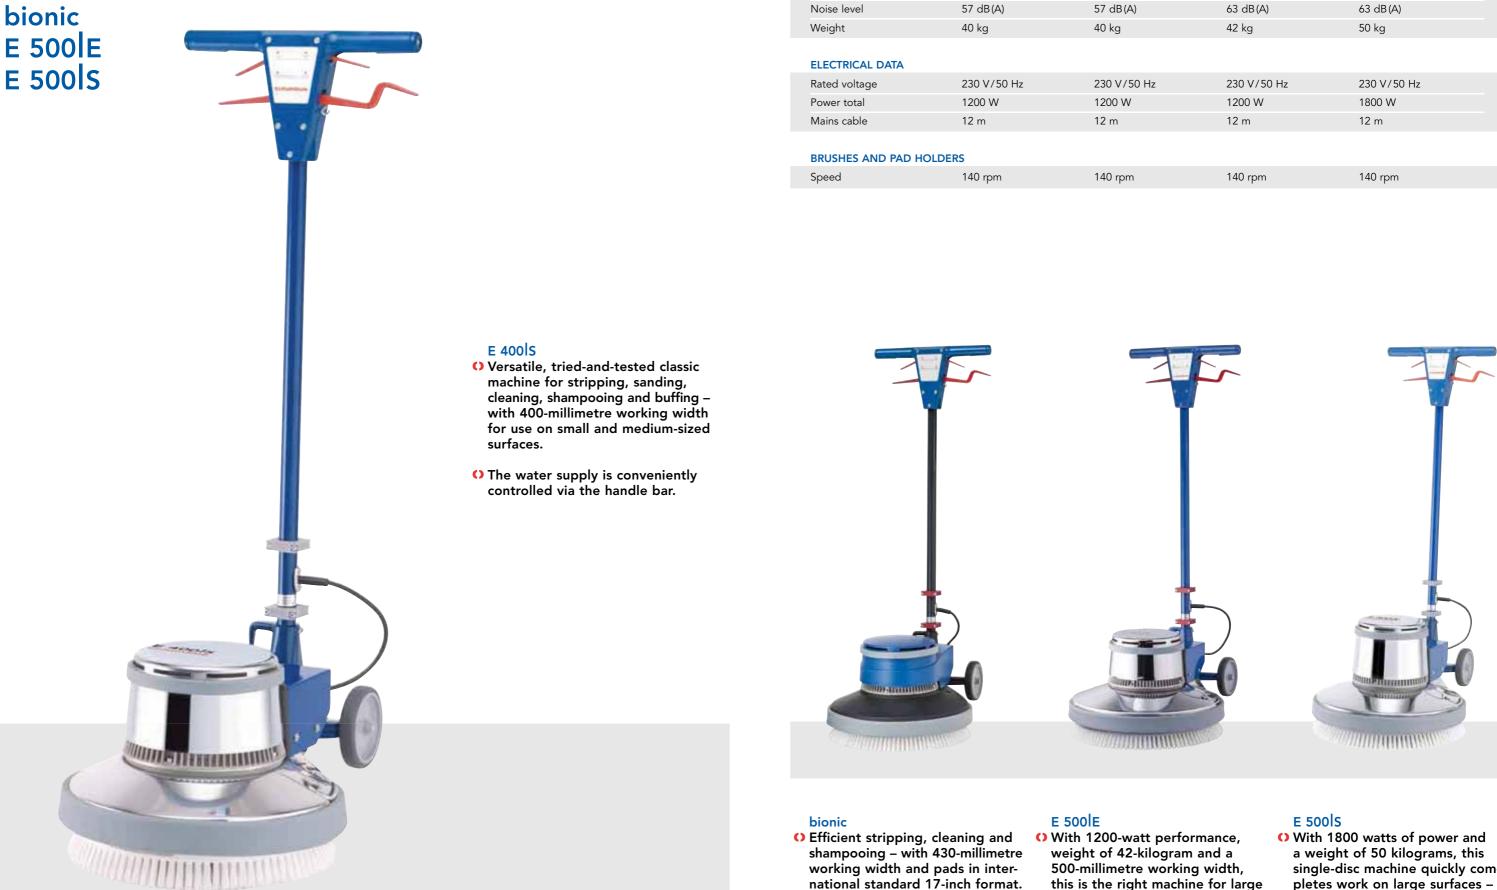

this is the right machine for large surfaces and demanding tasks such as crystallization of stone flooring or stripping of any other hard flooring.

• The shatter proof plastic casing

protects furniture and fragile

objects.

	E 500IE	E 500IS
170 mm	480 x 630 x 1215 mm	480 x 630 x 1215 mm
	500 mm	500 mm
	145 mm	150 mm
	305 mm	345 mm
	63 dB(A)	63 dB(A)
	42 kg	50 kg

23	0 V/50 Hz	230 V/50 Hz
12	200 W	1800 W
12	? m	12 m

E 400|S

400 mm

145 mm

300 mm

L x W x H

Working width

Ground clearance max.

Working height max.

415 x 550 x 1200 mm

bionic

430 mm

145 mm

300 mm

445 x 570 x 11

single-disc machine quickly completes work on large surfaces be it stripping, crystallization, sanding parquet flooring or descaling hard floor surfaces at industrial sites.

### THE ALL-ROUNDER. **Duo Speed** HS 403

### **Duo Speed**

• Two performance classes in one machine – all at the push of a button: 150 rpm at 1300 watts or 300 rpm at 1800 watts.

> For stripping of hard floors, intermediate cleaning of textile floors as well as for light polishing work.

• The maintenance-free planetary gear with three planet gears transfers the power optimally

### HS 403

• This machine – with a high-torque, centrally mounted motor - is ideal for economical spray cleaning and polishing in buildings with various surfaces.

## AND THE SHINY SPECIALISTS. HS 434 HS 1001 HS 1601

### HS 434

- of floor coatings and, with the optional suction unit, ideal for renovation of coatings to protect modern floor surfaces.
- The belt drive allows large surface areas to be covered, with low noise levels of just 57 decibels when running.

### HS 1001

done fast: this powerful, highspeed machine with a belt drive ensures a high-gloss finish on large surfaces.



	HS 434
L x W x H	450 x 565 x 1170 mm
Working width	430 mm
Ground clearance max.	160 mm
Working height max.	345 mm
Noise level	57 dB(A)
Weight	33 kg
ELECTRICAL DATA	

ELECTRICAL DATA			
Rated voltage	230 V/50 Hz		
Power total	1500 W		
Mains cable	12 m		

#### **BRUSHES AND PAD HOLDERS**

Speed	400 rpm
1	· · · ·



	Duo Speed	HS 403
L×W×H	415 x 550 x 1200 mm	415 x 550 x 1200 mm
Working width	400 mm	400 mm
Ground clearance max.	145*/165** mm	160 mm
Working height max.	335*/355** mm	320 mm
Noise level	62/70 dB(A)	67 dB(A)
Weight	48.5 kg	40 kg
Working height max. Noise level	335*/355** mm 62/70 dB(A)	320 mm 67 dB(A)

### ELECTRICAL DATA

Rated voltage	230 V/50 Hz	230 V/50 Hz
Power total	1300/1800 W	1200 W
Mains cable	12 m	12 m

### **BRUSHES AND PAD HOLDERS**

 $\ensuremath{^*\!with}$  columbus pad holder and pad

\*\* with vibration-cushioned pad holder and pad

#### HS 1601

- Single-disc machine for treatment Easy to control and gets the work A super shine on even the hardest surface coatings is guaranteed thanks to 1600 rpm.
  - The mechanical pressure limit protects the floor covering from damage.



HS 1001	HS 1601
500 x 770 x 1160 mm	500 x 770 x 1160 mm
500 mm	500 mm
95 mm	95 mm
330 mm	330 mm
63 dB(A)	66 dB(A)
42.5 kg	42.5 kg
230 V/50 Hz	230 V/50 Hz
1500 W	1500 W
12 m	12 m

1,000 rpm

1600 rpm

# THERMOPAD. THERMO-ACTIVE CARPET CARE. UNIQUE. AND ONLY FROM COLUMBUS.

### Thermopad



- O Impressive operating principle: the cleaning agent uses heat to quickly loosen even worn-in dirt, which is picked up fast and without residue by the Queen Bonnet Pad.
- () The system works equally effectively on all kinds of carpet and contributes to maintaining the quality of the
- Whisper quiet: the machine produces very little noise when in operation and can be used during working
- The heat supply can be altered by adjusting the thermostat, depending on the textile material.

- O Better for the environment: the moistened pad allows for the deep and thorough cleaning of carpets with minimal use of cleaning agents.
- The special cleaner Maxil can be sprayed easily and evenly onto the floor with the pressure sprayer, and worn-in stains can be additionally targeted and treated.
- O Expanded spectrum of uses: the Thermopad is also suitable for oiling of parquet and wooden floors with less oil, deeper penetration and significantly shorter drying times compared to conventional methods.
- What's more, by using the Thermopad, wax stains in churches or catering areas can be quickly loosened and removed without leaving residue.



	Thermopad
L×W×H	450 x 565 x 1170 mm
Working width	430 mm
Ground clearance max.	135 mm
Working height max.	290 mm
Noise level	63 dB(A)
Weight	35 kg

### ELECTRICAL DATA

Rated voltage	230 V/50 Hz
Power total	3050 W
Power heater fan	2150 W
Driving motor	900 W
Mains cable	12 m

#### **BRUSHES AND PAD HOLDERS**

Speed

180 rpm

### THE RIGHT ACCESSORY. MAKES MORE OUT OF YOUR MACHINE.

#### Additional weights

• Additional weights allow the grinding pressure to be individually adjusted for a uniform surface pattern, even on difficult surfaces.

### Tank

- Twelve-litre plastic tank for the use of cleaning solution during work.
- The tank is easy to remove and has a large opening for quick filling.

### Spray tool

- Suitable for even spraying across floors when cleaning, spray cleaning or crystallisation.
- Complete spray kit includes pump spray bottle, hose and a double clamp to fix the spray tool to the handle bar.

### Suction unit

• Suction tool with connector piece and suction ring for dust-free polishing, sanding or cleaning.



### columbus brushes for any application



columbus pad holders



Super pads from hard to soft



### Pad holder

- O Universal, entirely dust-proof and waterproof, autoclavable up to 140°C: the innovative columbus pad holder with laser-welded connection between base plate and rubber plate.
- () Thanks to a new manufacturing process and special plastic formulation, the pad holders have almost limitless durability and are completely recyclable.


### Brushes

- columbus brushes have dense, stiff bristles across the entire exposed area, for increased stability, quieter running and less wear and tear.
- Diagonally positioned outer bristles allow cleaning work to the very edges.

### Extras

- Grinding mesh and abrasive papers with grain from extra rough to extra fine.
- Paper bag for the suction unit.
- Extension cable 12- or 25-metre, waterproof and kink-proof.

### Pad holder with edgeless rubber plate and pad

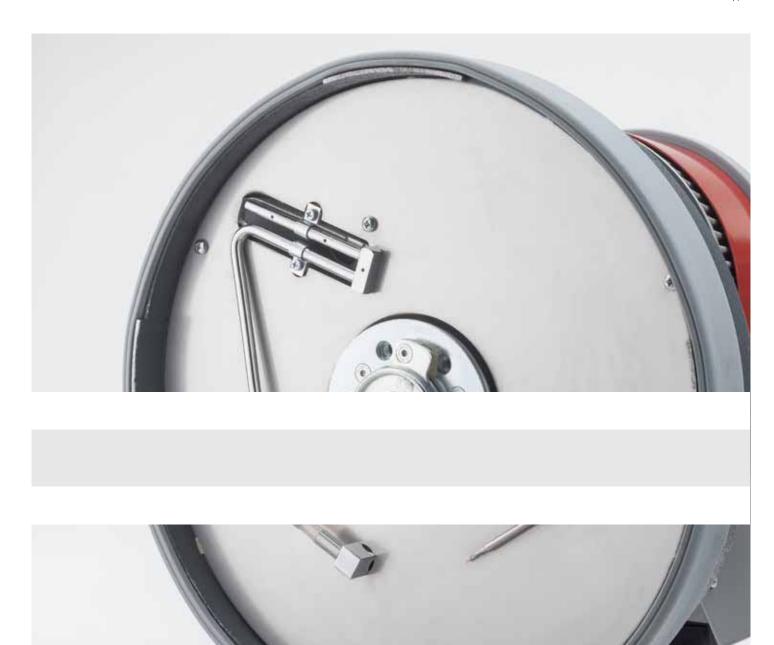

G. Staehle GmbH u. Co. KG Mercedesstrasse 15 D 70372 Stuttgart Phone +49 (0)7 11/95 44 - 950 Fax +49 (0)7 11/95 44 - 941 info@columbus-clean.com www.columbus-clean.com

# CLEAN IS QUALITY COlumbus